

Professional Digital Multimeter Models CA5205, CA5210, CA5220, CA5230 & CA5240



The AEMC® Instruments CA5000 Series are designed for the daily needs of professional electricians. For the safety of the user, these multimeters meet the most demanding international standards: double insulation in accordance with EN 61010-1-III-2, 600V, Cat. III.

These tough, reliable and economical Digital Multimeters (DMMs) feature a large backlit display, clear push-button functions, large rotary range selector and dedicated push buttons. The compact, handheld size along with the rugged, shockproof rubber holster makes this unit ideal for toolboxes and pockets.

Model CA5205 has a 2000-count display that is average sensing and provides 1% accuracy of Reading. Models CA5210, CA5220 and CA5230 have a 4000-count display are average sensing and provide 1% accuracy (Models CA5210 and CA5220), and 0.25% accuracy (Model CA5230) of Reading.

Features

- Tough, reliable, economical, professional DMMs in choice of 2000-, 4000- and 40,000-count models
- Automatic AC/DC selection (Model CA5205)
- Large backlit display
- Clear pushbutton functions
- Large rotary range selector and dedicated push buttons
- Rugged shockproof Multistand™ rubber holster for lead and probe storage

- Safety rated to EN 61010, 600V, Cat. III for protection against spikes and over-voltage
- Accurate average sensing or TRMS models for your linear loads and distorted signals
- Complete line of accessories including leads and industry's largest selection of current probes

Applications

- Installation, repair or maintenance of industrial equipment
- Electrical field testing
- Troubleshooting failures and poor performance



Model CA5205 measuring resistance in a relay cabinet.

Specifications

MODELS	CA5205 ⁽³⁾	CA5210 ⁽⁴⁾	CA5220	CA5230	CA5240
DC VOLTAGE					
Measurement Range ⁽¹⁾	5 Ranges: 200mV to 600V	5 Ranges: 400mV to 600V	5 Ranges: 400mV to 600V	5 Ranges: 400mV to 600V	5 Ranges: 400mV to 600V
Resolution	0.1mV to 1V	0.1mV to 1V	0.1mV to 1V	0.1mV to 1V	10 μ V to 100mV
Basic Accuracy*	$\pm 1\%$ of Reading ± 1 ct	$\pm 1\%$ of Reading ± 1 ct	$\pm 1\%$ of Reading ± 1 ct	$\pm 0.25\%$ of Reading ± 1 ct	$\pm 0.1\%$ of Reading ± 3 cts
Input Impedance ⁽²⁾	3M Ω	10M Ω	10M Ω	10M Ω	3M Ω
AC VOLTAGE					
Measurement Range ⁽¹⁾	5 Ranges: 200mV to 600V	5 Ranges: 400mV to 600V	5 Ranges: 400mV to 600V	5 Ranges: 400mV to 600V	5 Ranges: 400mV to 600V
Resolution	0.1mV to 1V	0.1mV to 1V	0.1mV to 1V	0.1mV to 1V	10 μ V to 100mV
Basic Accuracy*	$\pm 1\%$ of Reading ± 5 cts	$\pm 1.5\%$ of Reading ± 1 ct	$\pm 1.5\%$ of Reading ± 1 ct	$\pm 1\%$ of Reading ± 3 cts	$\pm 1.5\%$ of Reading ± 20 cts
Input Impedance ⁽²⁾	3M Ω	10M Ω	10M Ω	10M Ω	3M Ω
DC CURRENT					
Measurement Range ⁽¹⁾	–	–	3 Ranges: 40mA to 10A	3 Ranges: 40mA to 10A	3 Ranges: 40mA to 10A
Resolution	–	–	10 μ A to 10mA	10 μ A to 10mA	1 μ A to 1mA
Basic Accuracy*	–	–	$\pm 1.5\%$ of Reading ± 2 cts	$\pm 1.2\%$ of Reading ± 5 cts	$\pm 0.5\%$ of Reading ± 10 cts
AC CURRENT					
Measurement Range ⁽¹⁾	–	–	3 Ranges: 40mA to 10A	3 Ranges: 40mA to 10A	3 Ranges: 40mA to 10A
Resolution	–	–	10 μ A to 10mA	10 μ A to 10mA	1 μ A to 1mA
Basic Accuracy*	–	–	$\pm 1.5\%$ of Reading ± 2 cts	$\pm 0.8\%$ of Reading ± 4 cts	$\pm 0.9\%$ of Reading ± 5 cts
RESISTANCE					
Measurement Range	6 Ranges: 200 Ω to 20M Ω	6 Ranges: 400 Ω to 40M Ω	6 Ranges: 400 Ω to 40M Ω	6 Ranges: 400 Ω to 40M Ω	6 Ranges: 400 Ω to 40M Ω
Resolution	0.1 Ω to 10k Ω	0.1 Ω to 10k Ω	0.1 Ω to 10k Ω	0.1 Ω to 10k Ω	0.1 Ω to 10k Ω
Basic Accuracy*	$\pm 1.5\%$ of Reading ± 5 cts	$\pm 1.5\%$ of Reading ± 3 cts	$\pm 1.5\%$ of Reading ± 3 cts	$\pm 0.5\%$ of Reading ± 3 cts	$\pm 0.2\%$ of Reading ± 3 cts
CONTINUITY					
Beeper Activation	$\leq 700\Omega$	$\leq 40\Omega$	$< 40\Omega$	$< 40\Omega$	$< 40\Omega$
DIODE					
Resolution	1mV	1mV	1mV	1mV	1mV
Basic Accuracy*	$\pm 2\%$ of Reading ± 15 mV	$\pm 2\%$ of Reading ± 15 mV	$\pm 2\%$ of Reading ± 15 mV	$\pm 1\%$ of Reading ± 2 cts	$\pm 1\%$ of Reading ± 10 cts
CAPACITANCE					
Measurement Range	–	5 ranges: 4nF to 40 μ F	5 ranges: 4nF to 40 μ F	5 ranges: 4nF to 40 μ F	5 ranges: 4nF to 40 μ F
Basic Accuracy*	–	$\pm 5\%$ of Reading ± 10 cts	$\pm 5\%$ of Reading ± 10 cts	$\pm 1.5\%$ of Reading ± 4 cts	$\pm 1.5\%$ of Reading ± 5 cts
FREQUENCY					
Measurement Range	–	–	5 Ranges: 10Hz to 400kHz	5 Ranges: 100Hz to 400kHz	5 Ranges: 100Hz to 400kHz
Basic Accuracy*	–	–	$\pm 0.1\%$ of Reading ± 2 cts	$\pm 0.1\%$ of Reading ± 20 cts	$\pm 0.1\%$ of Reading ± 10 cts
GENERAL					
Digital Display	2000-count	4000-count	4000-count	4000-count	40,000-count
Analog Bargraph	–	40-segment	40-segment	40-segment	40-segment
Power Source	2 "AA" Batteries 1.5V			1 Battery 9V	
Dimensions	7.0 x 2.5 x 1.7" (177 x 64 x 42mm)				
Weight	0.7 lb (350g)				
ENVIRONMENTAL					
Operating Temperature	32° to 122°F (-10° to 60°C)				
Storage Temperature	-4° to 140°F (-40° to 70°C)				
SAFETY					
Safety Rating	EN 61010, 600V, Cat III				
CE Mark	Yes				

(1) Use on frequency: 0 to 60Hz


(2) For the CA5210/CA5220, on position V elec: base impedance 270k Ω

(3) Automatic recognition of DC or AC

(4) Additional function "ADP": input 0 to 400mVdc for accessories

* Accuracy dependent on range

Construction

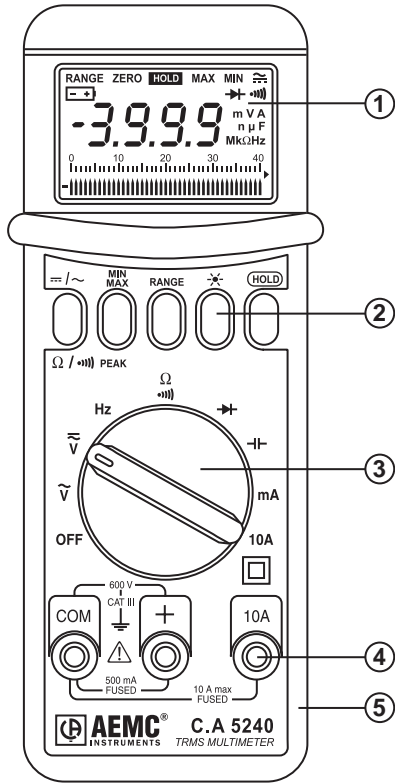

- 1. LCD display
- 2. Control buttons
- 3. Rotary range selector switch
- 4. Safety terminals (4mm)
- 5. Shockproof rubber holster

Model CA5240



Test Leads included with CA5000 Series

ORDERING INFORMATION	CATALOG NO.
DMM Model CA5205 (2000-count, Average Sensing, 1% Accuracy)	Cat. #2116.73
DMM Model CA5210 (4000-count, Average Sensing, 1% Accuracy)	Cat. #2116.74
DMM Model CA5220 (4000-count, Average Sensing, 1% Accuracy)	Cat. #2116.75
DMM Model CA5230 (4000-count, TRMS, 0.25% Accuracy)	Cat. #2116.76
DMM Model CA5240 (40,000-count, TRMS, 0.1% Accuracy)	Cat. #2116.77

Contact Us

United States & Canada:

Chauvin Arnoux®, Inc.
d.b.a. AEMC® Instruments
200 Foxborough Blvd.
Foxborough, MA 02035 USA
(508) 698-2115 • Fax (508) 698-2118
www.aemc.com

Customer Support – for placing an order, obtaining price & delivery:
customerservice@aemc.com

Sales Department – for general sales information:
sales@aemc.com

Repair and Calibration Service – for information on repair & calibration, obtaining a user manual:
repair@aemc.com

Technical and Product Application Support – for technical and application support:
techinfo@aemc.com

Webmaster – for information regarding www.aemc.com:
webmaster@aemc.com

South America, Central America, Mexico, Caribbean, Australia & New Zealand:

Chauvin Arnoux®, Inc.
d.b.a. AEMC® Instruments
15 Faraday Drive
Dover, NH 03820 USA
(978) 526-7667 • Fax (978) 526-7605
export@aemc.com
www.aemc.com

All other countries:

Chauvin Arnoux SCA
190, rue Championnet
75876 Paris Cedex 18, France
33 1 44 85 45 28 • Fax 33 1 46 27 73 89
info@chauvin-arnoux.com
www.chauvin-arnoux.com