

GE
Lumination

RX11 LED Arrow Signals

12 inch Red, Yellow, Green

Features, Benefits and Values



- High efficiency & long life LED light source
- Designed to conform to applicable ITE specifications and Caltrans light intensity requirements
- Failure of single LED results in loss of light from only that LED
- Moisture and dust resistant
- Direct retrofit design
- Incandescent look
- Masked arrow for better definition
- All products shipped with installed gasket
- EPEAT 2005 compliant



RX11 LED Arrow Signals

- 12 inch Red, Yellow, Green

Mechanical Outline Dimensions in inches. (mm) indicates metric equivalent

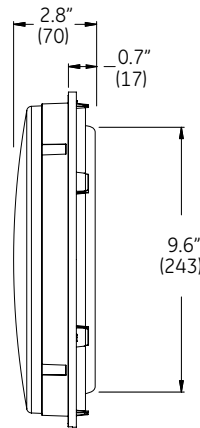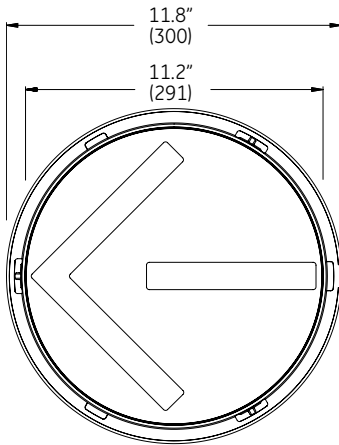

Design Compliance

Test Type	Compliance
Chromaticity	ITE VTCSH-STD Part 2
Moisture Resistance	NEMA STD 250 Type 4 - 1991
Mechanical Vibration	MIL-STD-883 Method 2007
Electronic Noise	FCC Title 47 Sec 15 Sub. B ¹
Transient Voltage Protection	ITE VTCSH-STD Part 2
Controller Compatibility	NEMA TS-2-1992
Wiring	National Electric Code

¹ Class A

Operating Specifications

Parameter	Rating
Operating Temperature Range	-40 to +74°C (-40 to +165°F)
Operating Voltage Range	80 to 135 V (60Hz AC)
Power Factor (PF)	> 90 %
Total Harmonic Distortion (THD)	< 20 %
Voltage Turn-off (VTO)	45 V
Lens & Shell Material	UV Stabilized Polycarbonate
Wiring	16 AWG, Color Coded with Strain Relief

Product Information

Model Number	AC Voltage	Power (W)	Wavelength (nm)
	Nominal	Nominal	Dominant
● DR6-RTAAN-21A	120V - 60 Hz	5	626
● DR6-YTAAAN-21A	120V - 60 Hz	10	589
● DR6-GCAAN-21A	120V - 60 Hz	5	508
● DR6-GTAAAN-21A	120V - 60 Hz	5	508

Standard product equipped with spade connectors.

Distributed by:



6180 Halle Drive • Valley View, Ohio, 44125-4635, USA
 P: 216.606.6612 • F: 216.606.6599 • W: www.led.com • E: signals@led.com

Lumination, LLC is a subsidiary of the General Electric Company. The GE brand and logo are trademarks of the General Electric Company.
 © 2008 Lumination, LLC. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.