


Dialight

SINGLE HAND and WALKING PERSON PEDESTRIAN SIGNALS

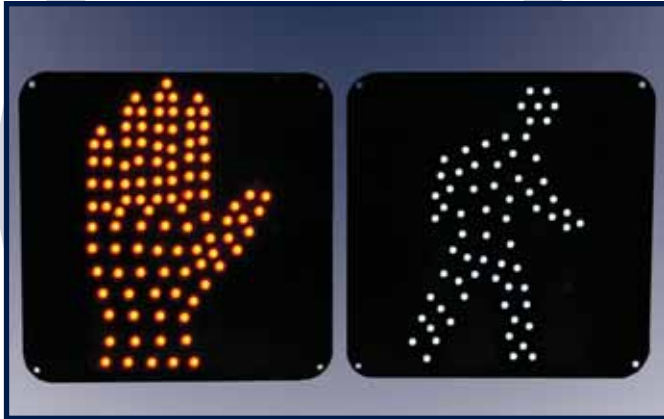

FEATURES / BENEFITS

- ▲ 90% reduction in power vs. incandescent
- ▲ Long life; up to 10 times longer than incandescent
- ▲ Sealed moisture resistant enclosure
- ▲ Lens available to fit most pedestrian heads
- ▲ Lens has a textured surface to reduce glare
- ▲ Easy to install into existing signal enclosure
- ▲ EPA Energy Star® qualified
- ▲ Filled icons are MUTCD compliant

SPECIFICATIONS

- ▲ Operating Voltage Range: 80VAC to 135VAC (120 VAC Nominal)
- ▲ Fuse and transient suppressor incorporated for line and load protection
- ▲ Operating Temperature Range: -40°C to +74°C
- ▲ Turn-On/Turn-Off Time = 75 msec max
- ▲ Power factor > 0.9
- ▲ Total harmonic distortion < 20%
- ▲ Meets FCC Title 47, Subpart B, Section 15 Regulations for electrical noise
- ▲ Conforms to MIL-STD-810F for blowing rain
- ▲ Provided with quick connect terminals and spade adapters
- ▲ Written manufacturer's warranty available on request
- ▲ All products traceable by serial number
- ▲ LED Colors: Hand - Portland Orange
Walking Person - Lunar White

TYPICAL OPERATION CHARACTERISTICS

PART NUMBER	Housing Size (inches)	DESCRIPTION	Typical Wattage @ 25°C	ENERGY STAR® Qualified	CSA Approved*
430-5770-001	12" x 12"	Filled Hand	6	●	●
430-7771-001	12" x 12"	Filled Person	6	●	

*CSA approval is to Std. 250 for Luminaires

Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



MDTSPDSX001_E